

# Flex-Rite™



**"Wine & Spirits"**

**RWS**

**...provides extra wear resistance!**

RWS's exterior polymer blend with wide/smooth corrugations ensures **low friction** and ease of movement. This suction & discharge hose is designed for extra flex and **wear resistance**. (Meets 3-A\* standards, USDA requirements and is FDA compliant). Delivers taste and odor free flow and easy clean up.

**Features:**

- Low Friction/Easy Drag
- Highly Flexible
- Wear Resistant
- Full Vacuum
- Easy Clean Up
- Exterior Corrugations allow for draining
- Long Length 130 ft.


**Applications:**

- Long Run Transfer
- Suction & Discharge
- Receiving Bay
- High Alcohol Suction & Transfer
- Brewing & Spirits

MODEL	I.D.	O.D.	WORKING PRESSURE	MIN. BEND RADIUS	WEIGHT PER FT.	VAC. IN HG.	LENGTH
RWS150	1 1/2"	2.09"	150 PSI	4.0"	1.00 lbs.	29"	130'
RWS200	2"	2.69"	150 PSI	5.0"	1.39 lbs.	29"	130'
RWS250	2 1/2"	3.13"	150 PSI	6.5"	1.68 lbs.	29"	130'
RWS300	3"	3.64"	150 PSI	7.5"	2.11 lbs.	29"	130'
RWS400	4"	4.77"	150 PSI	9.0"	3.15 lbs.	29"	130'

**TUBE** White, FDA, 3-A\*, Chlorobutyl  
**REINFORCEMENT** High strength synthetic cord with steel wire helix  
**RECOMMENDED CLEANING** CIP, COP

**COVER** Red Thermoplastic w/white stripe  
**TEMP. RANGE** -40 to 250° F

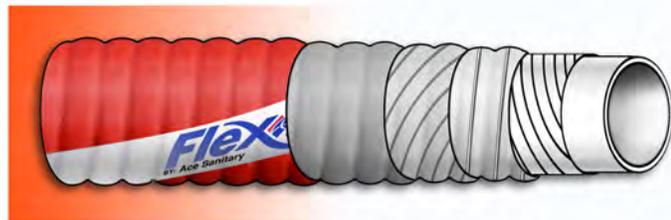

ALL R-Series hose products meet/comply: USDA Class III requirements, FDA CFR Title 21.1772600, 3-A 18-03  
 \*The 3-A 62-02, standard applies only to assemblies of 3/4" diameter and larger.  
**WARNING** Working pressure ratings for all Flex-Rite™ brand hoses are based on 70° F (ambient temperature). Working pressure and vacuum ratings will decrease as temperatures increase. For "R" series applications that exceed 200° F contact manufacturer for suggestions.

