

100% Oil-Free - Guaranteed

Oil-Free Rotary Screw Compressors Fixed & Regulated Speed (RS)



D37 – D315 D37RS – D315RS

Innovative oil-free compressed air technologies

Air and Water Cooled

GP

03



ArPurity

- that meets the most stringent hygienic standards





0

At a glance

- Class Zero Oil FREE Rotary Screw Compressors
- · Air- and Water-Cooled
- Fixed Speed and Variable Speed Models
- Air purity that meets the most stringent hygienic standards
- Outstanding reliability for demanding applications

Engineered to meet your needs:

Premium efficiency two stage airend design



Unique closed cooling water circuit for airend cooling



High quality IE 3 electric motor, optional IE 4

Efficient motor cooling



High ambient temperatures of up to 45°C

- Pressure range 4 to 10 bar
- Volume flow 5.1 to 51.8 m³/min
- Motor power 37 to 315 kW



Operational safety in demanding applications



Free iConn inside



PureCare 6 year warranty





CompAir have been designing, manufacturing and supplying oil-free compressors for more than 100 years.

Engineering excellence

Compressors are more than just a financial investment, they are a key component to ensuring that manufacturers, processors and operators receive consistent, high quality, low cost air.

The screw compression element is the heart of the compressor and therefore CompAir keeps the design and manufacture in-house, using the latest CNC rotor grinding machinery, coupled with online laser technology.

Combined with CompAir's superior long-life hard coating, highest reliability and stable performance, low operating costs are ensured throughout the compressors life.

Air purity



55

No matter what industrial sector, there is a growing demand for higher quality, oil free compressed air that meets stringent quality standards.

Whether it is needed for food and beverage or chemicals production, supply of pharmaceuticals, electronics or sensitive components, manufacturers will no longer accept the risk of product or equipment contamination. For this reason, CompAir's D-Series offers the highest standard of air purity and has been certified ISO 8573-1 Class Zero (2010) and silicone free.



CompAir Com





- 100% oil-free, near isothermal compression
- High reliability thanks to constant low temperatures

Guaranteed efficiency with IE3 electric motor

- IE4 electric motor optionally available
- Automatic motor lubrication
- Legal conformity
- High reliability
- Operational safety

Easy installation & easy servicing

- Small footprint and compact size
- All connections on one side
- Easy ducting
- Perfect service accessibility
- Low number of parts and consequently less to service
- · Long-term service interval
- Separate compressed air inlet, allowing external air suction

Excellent cooling performance

- Optimum motor cooling
- Closed cooling water circuit for airend cooling
- For constant low temperature levels
- Avoids pollution
- Less gearboxes required
- Level regulated electronic condensate drain

Air cooling

- Two efficient radial fans
- In accordance with ErP Efficiency Legislation 2015
- Low noise level
- Low pressure loss
- Speed regulated fans for minimum power consumption at any load

Water cooling

- High quality shell and tube coolers
- Independent from ambient temperature
- Low noise level
- · Optionally stainless steel coolers

Compact design – easy installation

The small footprint reduces the space required for installation



Easy Servicing

- The design of these packages ensures that the service points are readily accessible
- The enclosure side doors are hinged and removable to allow complete access to all service points
- The reduced number of moving parts further lowers the maintenance costs



- The annual cost of ownership can be significantly reduced using regulated speed technology.
- "State-of-the-art performance through high efficiency components, low pressure losses, low temperatures and economical control."




- · Integrated in the electric cabinet
- Maximum reliability from optimised cooling system
- · Ensures high availability and long-life



The D-RS Series products are designed to obtain the greatest efficiency across the entire operating range.




Wide regulation range



Perfect motor - drive airend design

High efficiency across broad flow range

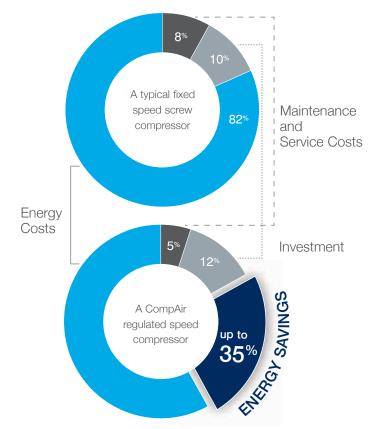



Perfect performance

Delcos XL innovative touch screen compressor controller

The Delcos XL with its high resolution touch screen display is extremely user-friendly and selfexplanatory. All functions are clearly structured in five main menus and are intuitively visual.

Features & functions

- Precise monitoring for exceptional operational reliability
 - Ambient pressure and temperature
 - Inlet and outlet pressure and temperature at both stages
 - Network pressure and temperature
 - Oil / water pressure and temperature
 - Oil / water level
 - ...and many more
- High resolution, easy-to-use touch-screen panel
- User-friendly clear menu structure
- Integrated SD card for in-depth analysis of monitored machine parameters
- Optional with base load sequencing for up to four units




Trend diagrams

With the ability to display detailed system analysis in the form of trend diagrams and graphs, operating parameters can be precisely set to maximise efficiency.

ICON

- Network pressure
- Motor speed (regulated speed models)
- On load hours / total running hours and average volume flow
- Weekly average volume flow



iConn Compressed Air Service 4.0

- ✓ Advanced remote analysis
- ✓ Predictive evaluates historic data
- ✓ Maximises energy efficiency
- ✓ Optimises compressor performance
- ✓ Reduces downtime
- ✓ Works as an open standard
- ✓ Free on new compressors can be retrofitted
- ✓ Proactive maintenance

...why you cannot ignore iConn!





air management system

Energy management is crucial for all compressed air users, as the highest cost factor of a compressor is the energy to run it. Over a period of five years, energy accounts for typically 80% of the total costs. Compressed air systems typically comprise of multiple compressors delivering air to a common distribution system. The combined capacity of those machines is generally greater than the maximum site demand.

Characteristics of each compressor

8.3 bar 5 8.5 bar 8.1 bar	9.0 m ³ /min
Parameters compr	essor 1
K1 Control: Current priority: Total hours: Loaded hours: FAD max.: FAD max.: FAD cur: FAD min.: Final temperature: Final pressure: Line press. at compres	DELCOS XL-LRS Norm 54206 h 52025 h 9. 0 m³/min 7. 3 m³/min 3. 0 m³/min 41 °C 8. 8 bar ssor. 8. 5 bar

Why a profitable investment

compressor management system

- Harmonises the workload of up to 12 fixed or regulated speed compressors including downstream
- Eliminates energy waste by tightening the network pressure to the narrowest pressure band
- Equalises the running hours for economic servicing and increased uptime
- Optimum performance and monitoring

www.compair.com

Increased plant productivity

Diagram display

8.3 bar		.5bar 1bar	8.9 m ³ /min
Line pressur	e 1		
10.0			
8.3 [bar]	~		
5.0			
16:06		300s	16:11
< Back			




FOWadd further Value AirPlus

Heat recovery

Can be either factory fitted or supplied as retrofit kit including all necessary pipe-work and fittings.

Your benefits

- Significant cost savings
- Lower CO₂ emissions
- Low investment costs
- Approximately 80% recovery

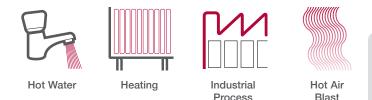

Base load sequencing

Compressed air systems typically comprise of multiple compressors delivering air to a common distribution system. The addition of the optional base load sequencing module will allow central control of up to four compressors matching delivery to the plant demand.

Compressed air treatment

Complia

A modern production system and process demands increasing levels of air quality, and compressed air operators need to ensure that the downstream equipment also delivers on it 100%.

They don't need to worry about the quality of their compressed air – quality that is key to ensuring maximum production efficiency and investment protection.

The new downstream portfolio manufactured by CompAir utilising the latest technology, provides an energy efficient solution at lowest life cycle costs. The same quality, performance and efficiency standards delivered by the compressors can now be enjoyed from the air treatment range.

- ✓ Water Cyclone Separators
- ✓ Compressed Air Filters
- ✓ Condensate Drain System
- Compressed Air Refrigerant Dryer
- Heatless Desiccant Dryers
- ✓ Heat Regenerative Desiccant Dryers
- Heat-of-Compression Dryers (HOC)
- ✓ Subfreeze Dryers
- ✓ Nitrogen Generator



Protectyour Investment

PureCARE - Six years extended warranty

In combination with one of our ASSURE Service plans we will provide our extended PureCARE warranty. For you this means complete peace of mind for the first 6 years or 44.000 hours, because all critical parts, including airends, motors, coolers etc, are covered by the Purecare warranty. With AssurePLAN COMPLETE, you will be able to eliminate any risk for periods up to 10 years . Please discuss with your CompAir Authorised Service Provider which Service Plan fits best to your individual needs.

Assure Service Plans

Specifically developed to support our oil-free product range, the CompAir Assure service programmes go beyond traditional service schemes to ensure uninterrupted quality compressed air supply coupled with optimum compressor performance, giving you peace of mind for your production. Assure Service plans are delivered by factory-trained CompAir technicians specifically to keep your oil-free compressed air system at peak performance, supported by the unrivalled quality and performance of CompAir genuine parts. Each Assure Service plan is tailored to your specific application and site circumstances, ensuring system reliability and productivity at optimum cost.

CompAir genuine spare parts

Genuine CompAir parts and lubricants ensure that compressed air plant reliability and efficiency is maintained at the highest standards. CompAir spare parts are distinguished by:

- · Long service life, even under harshest conditions
- Minimum losses contributing to energy savings
- High reliability improving plant up-time
- Products manufactured with the strictest
 Quality Assurance Systems

Flexible Service Options

Assure Oil Free Service Plans	Assureplan ⁺	Exercise Complete
Preplanned Preventative Consumable Parts and Labour	\checkmark	\checkmark
Preplanned Preventative Wearable Parts and Labour	\checkmark	\checkmark
iConn	\checkmark	Premium
Warrantable repairs (parts and labour)	First 6 Years	✓
Repairs for parts excluded from warranty (parts and labour)	\checkmark	\checkmark
Any repair outside warranty (parts and labour)	_	\checkmark
24/7 365 emergency support	_	\checkmark
Maximum contract duration	10 Years	10 Years



Technicadata

D37-D75 Fixed Speed

Compressor Model	Cooling Method	Motor Rating	Nominal Pressure			Air Deliver		Dimensions L x W x H	Noise Level ^{2]} [dB(A)]	Weight							
		[kW]		bar g	ıl	7 bar g	8.5 bar g	10 bar g	[mm]	[8 bar g]	[kg]						
D07	Air	07	_		0 5	6.0	5.1		0040	76	2387						
D37	Water	37	37	37	37	37	37	37	37	1	8.5	6.0	5.2	-	2248 x 1372 x 1917	76	2410
DIE	Air	45	_	_		0 5	7.7	6.5		0040	76	2497					
D45	Water		(8.5	7.7	6.5	-	2248 x 1372 x 1917	76	2520						
DEE	Air		7	0.5	10	9.6	8.8	7.7	0040	76	2577						
D55	Water	55	(8.5	10	9.6	8.8	7.8	2248 x 1372 x 1917	76	2600						
	Air		7	0.5	10	12.7	11.6	10.7	0040	76	2682						
D75s	Water	75	(8.5	10	12.7	11.7	10.8	2248 x 1372 x 1917	76	2705						

D75 – D315 Fixed Speed

Compressor Model	Cooling Method	Motor Rating	Nominal Pressure		Delivered ^{1]} min]	Dimensions L x W x H		Level ^{2]} 3(A)]	Weight		
		[kW]	[bar g]	8 bar g	10 bar g	[mm]	8 bar g	10 bar g	[kg]		
DZE	Air	75	0 10	10.01	10.00	0507 x 1744 x 0001	75	74	3023		
D75	Water	75	8 - 10	12.91	10.63	2597 x 1744 x 2001	72	70	3223		
Doo	Air	90	0 10	15.05	10.70	2597 x 1744 x 2001	76	75	3223		
D90	Water	90	8 - 10	15.65	13.79	2597 X 1744 X 2001	73	72	3423		
D110	Air	110	0 10	10 51	17.00	0507 x 1744 x 0001	77	77	3265		
D110	Water	IIU	8 - 10	19.51	17.39	2597 x 1744 x 2001	75	74	3465		
D100	Air	132	0 10	00.00	00.50	2597 x 1744 x 2001	78	78	3432		
D132	Water		8 - 10	22.39	20.50	2597 X 1744 X 2001	77	76	3632		
Dico	Air	100	10		00.00	0507		78	3644		
D160	Water	160	10	_	_	_	22.33	2597 x 1744 x 2001		77	3844
Dioc	Air		0 10	29.0	04.0	0000 100 1 0100	78	78	5170		
D165	Water	160	8 - 10	29.1	24.9	3300 x 1994 x 2190	77	78	4715		
Dooo	Air	000	0 10	35.8	22	0000 × 1004 × 0100	81	81	5515		
D200	Water	200	8 - 10	36.1	32	3300 x 1994 x 2190	80	81	5060		
DOFO	Air	050	0 10	44.1	07.0	2200 × 1004 × 0100	84	83	5670		
D250	Water	250	8 - 10	44.5	37.2	3300 x 1994 x 2190	81	82	5215		
DOIE	Air	015	8	10.0	N.A.	0000 x 1004 x 0100	87	N.A.	5975		
D315	Water	315	8 - 10	49.2	44.5	- 3300 x 1994 x 2190	81	82	5520		

Carl Street and	
and the second second second	

D37RS-D75RS Regulated Speed

Compressor Model			Nominal Pressure	Free Air Delivered At Nominal Pressure ^{2]}	Dimensions L x W x H	Noise Level ^{2]}	Weight
		[kW]	[bar g]	[m³/min]	[mm]	[dB(A)]	[kg]
00700	Air	07	0.5	F 4	0000 x 1115 x 0070	65 - 74	1579
D37RS	Water	37	8.5	5.1	2080 x 1115 x 2070	63 - 69	1624
	Air	45	8.5	6.3	2080 x 1115 x 2070	65 - 74	1579
D45RS	Water	45				63 - 69	1624
	Air		10	7.0	007010011047	76 - 80	2042
D55RS	Water	55		7.8	2078 x 1321 x 1947	76 - 80	2042
DZEDO	Air	75	10	10.0	0070 x 1001 x 1047	76 - 80	2042
D75RS	Water	75	10	10.6	2078 x 1321 x 1947	76 - 80	2042

D110RS – D315RS Regulated Speed

Compressor Model	Cooling Motor Method Rating				Delivered ^{1]} 'min]	Dimensions L x W x H	Noise Level at 70% Load ^{2]}	Weight
		[kW]	[bar g]	min.	max.	[mm]	[dB(A)]	[kg]
	Air	110	4 - 8	0.00	10.51	0507 x 1744 x 0001	76	3278
D110RS-8	Water	110	4 - 8	8.89	19.51	2597 x 1744 x 2001	72	3478
D110RS-10	Air	110	4 - 10	10 51	17.68	0507 x 1744 x 0001	76	3278
D110RS-10	Water	TIU	4 - 10	10.51	17.08	2597 x 1744 x 2001	71	3478
	Air	100	4 0	0.05	00.05	0507 x 1744 x 0001	77	3476
D132RS-8	Water	132	4 - 8	8.95	22.95	2597 x 1744 x 2001	73	3676
D132RS-10	Air	132	4 - 10	10.51	01.10	0507 x 1744 x 0001	77	3476
D132R5-10	Water	132	4 - 10	10.51	21.10	2597 x 1744 x 2001	72	3676
	Air	100	4 - 10	10.40	00.50	0507 x 1744 x 0001	77	3688
D160RS-10	Water	160	4 - 10	10.40	23.52	2597 x 1744 x 2001	73	3888
D200RS-8.5	Air	000	4 - 8.5	17.3	37.4	3300 x 1994 x 2190	77	5565
D200R3-8.3	Water	200	4 - 8.3	17.3	37.4	3300 x 1994 x 2190	77	5110
	Air	000	4 10	10	00.0	0000 × 1004 × 0100	77	5565
D200RS-10	Water	200	4 - 10	18	33.2	3300 x 1994 x 2190	79	5110
D250RS-8.5	Air	250	4 - 8.5	17 /	7.4 46.9	3300 x 1994 x 2190	79	5720
D250R5-8.5	Water	200	4 - 8.3	17.4	40.9	3300 X 1994 X 2190	78	5265
	Air	050	4 10	10.4	44 7	0000 × 1004 × 0100	79	5720
D250RS-10	Water	250	250 4 - 10 18.4 41.7 3300	3300 x 1994 x 2190	79	5265		
	Air	015	4 0 5	10.0		000010010100	82	6025
D315RS-8.5	Water	315	4 - 8.5	16.6	51.1	3300 x 1994 x 2190	78	5570
D315RS-10	Water	315	4 - 10	18.3	48.5	3300 x 1994 x 2190	79	5570

¹ Data measured and stated in accordance with ISO 1217, Edition 4, Annex C and Annex C and Annex C and the following conditions:

Air Intake Pressure 1 bar a, Air Intake Temperature 20°C, Humidity 0 % (Dry).

 $^{\rm 2]}$ Measured in free field conditions in accordance with ISO 2151, tolerance \pm 3dB (A).





Global experience truly local service

With over 200 years of engineering excellence, the CompAir brand offers an extensive range of highly reliable, energy efficient compressors and accessories to suit all applications.

An extensive network of dedicated CompAir sales companies and premium partners across all continents provide global expertise with a truly local service,

ensuring our advanced technology is backed up with the right support.

CompAir has consistently been at the forefront of compressed air systems development, culminating in some of the most energy efficient and low environmental impact compressors on the market today, helping customers achieve or surpass their sustainability targets.

CompAir compressed air product range

Advanced Compressor Technology Lubricated

- Rotary Screw
- > Fixed and Regulated Speed
- Portable

Oil-Free

- Water Injected Screw
 - > Fixed and Regulated Speed
- Two Stage Screw
- > Fixed and Regulated Speed
- Rotary Scroll
- Ultima®

Complete Air Treatment Range

- Filter
- Refrigerant and Desiccant Dryer
- Condensate Management
- Heat of Compression Dryer
- Nitrogen Generator

Modern Control Systems

- CompAir DELCOS Controllers
- SmartAir Master Sequencer
- iConn Smart Compressor Service

CompAir policy is one of continuous improvement and we therefore reserve the right to alter specifications and prices without prior notice. All products are sold subject to the Company's conditions of sale.

Value Added Services

CompAir

- Professional Air Audit
- Performance Reporting
- Leak Detection

Leading Customer Support

Custom Engineered Solutions

PureAi

CompAir

- Local Service Centres
- Genuine CompAir Parts and Lubricants