

FlexRite™



FRH "RAISED HELIX"

This FDA grade hose is not suitable for 3-A applications

...easy handling for receiving bays!

FRH This hose is an excellent choice for receiving bays. Its exterior corrugations provide for tight bending and easy handling. Designed for adverse conditions or cleanup as water will not pool with use of the FRH. Versatile and flexible, this hose is ideal for suction and discharge use up to 150 PSI while not imparting taste or odor.

MODEL	I.D.	O.D.	WORKING PRESSURE	MIN. BEND RADIUS	WEIGHT PER FT.	VAC. IN HG.	LENGTH
FRH200	2"	2.59"	150 PSI	-	1.23 lbs.	29"	100'
FRH300	3"	3.58"	150 PSI	-	1.76 lbs.	29"	100'

TUBE White, FDA, 3-A*, Chlorobutyl

REINFORCEMENT 2 ply synthetic fabric

RECOMMENDED CLEANING CIP, COP

COVER Gray, w/orange PVC Helix


TEMP. RANGE -25 to 180° F

Features:

- Exterior Corrugations
- Easy Handling/Bending
- Suction & Discharge
- Will Not Pool
- Non Imparting of Taste or Odor

Applications:

- Receiving Bay
- Cleanup

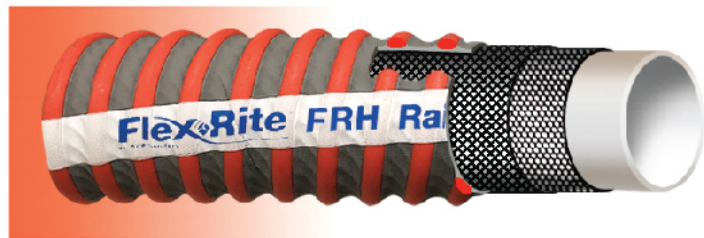

FRH *Raised Helix*

